


AquaCat™ FL

A cost-effective way to collect, dewater, transport, and dump sludges, slurries, and wet solids.

The AquaCat dewatering box comes with permanently mounted plastic filter media. It is designed to be used with light gravity sludge and slurries made up of very fine particles that require the addition of a flocculant for effective dewatering.

Applications Include:

- Bio-solids dewatering
- Grease trap waste
- Septic tank sludge
- Alum sludge



Features:

- Heavy-duty carbon steel construction (optional stainless steel)
- Designed to be handled by a standard garbage truck
- Typically two 2" drain ports located on the back wall
- Filter media covers the floor and walls
- Filter support panels made of expanded metal and perforated plates (optional materials available for support panels)
- Optional: double wall filters
- Micron size filters from 600 microns to 300 microns (30 mesh to 50 mesh)
- Locked hard top available
- Available front loader sizes: 2, 3, and 4 cubic yards


Available Models:



Model DH



Model RO

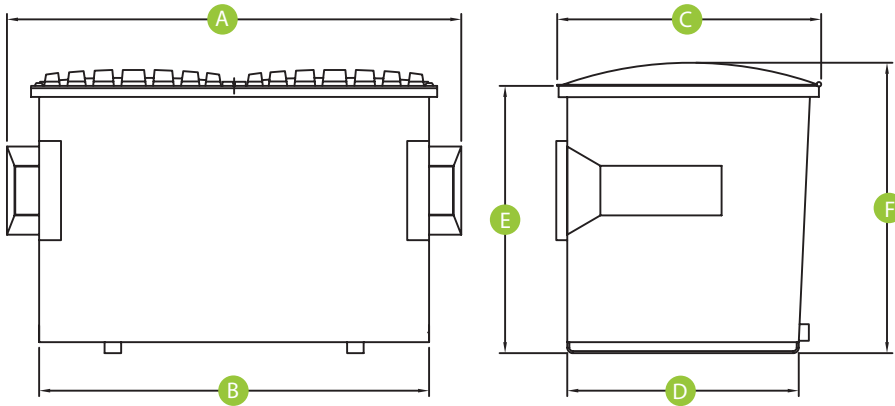

Model	Size	A	B	C	D	E	F	Dry Weight
ACFL2	2 yd	81 7/8	70 3/4	39 3/4	34	40 15/16	45 1/4	505
ACFL3	3 yd	82 7/16	70 3/4	46 3/4	42	48 1/2	52 11/16	602
ACFL4	4 yd	82 1/8	72	46 3/4	58	49 5/8	53 11/16	732

*Specifications subject to change without notice. Measurements are in inches and weights in pounds.

