



AquaCat™ RO

A cost-effective way to collect, dewater, transport, and dump sludges, slurries, and wet solids.

The AquaCat dewatering box comes with permanently mounted plastic filter media. It is designed to be used with light gravity sludge and slurries made up of very fine particles that require the addition of a flocculant for effective dewatering.


Available Models:



Model FL



Model DH





Features:

- Heavy duty carbon steel construction (optional stainless steel) 3/16" floor and 10 gage side walls with square bottom design, 6" x 2" x 1/4" bottom rails with steel wheels
- Gasketed, hinged water-tight rear door
- Designed to be handled by a standard hook and cable type roll-off truck (hook lift type mechanisms optional)
- Typical four 3" drain ports located on the bottom at opposite ends of the unit
- Filter media cover the floor, both side walls, and both sides of the installed center wall (optional door filter, front wall filter, and second double wall filter are available)
- Micron size filters from 600 microns to 300 microns (30 mesh to 50 mesh)
- Available container sizes: 15, 20, 30, and 40 cubic yards

Applications Include:

- Bio-solids dewatering
- Grease trap waste
- Septic tank sludge
- Alum sludge

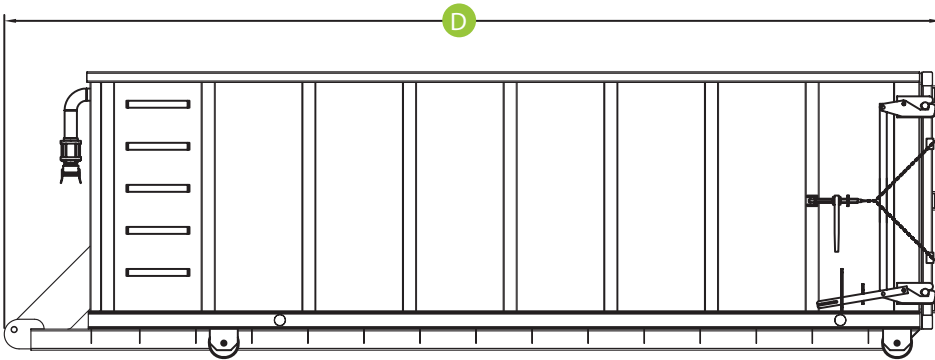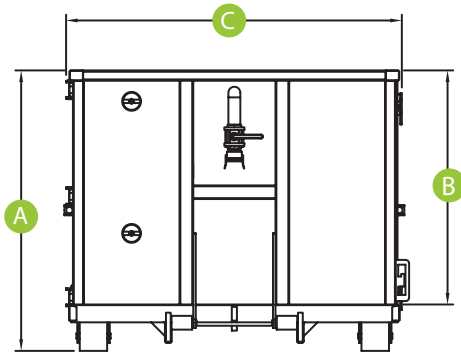

Model	Size	A	B	C	D	Dry Weight
ACDH01	15 yd	81.75	68.25	102	153.69	7,300
ACDH02	20 yd	81.75	68.25	102	193.69	10,500
ACDH03	30 yd	81.75	68.25	102	267.44	12,000
ACDH04	40 yd	94.5	81	102	293.69	12,750

*Specifications subject to change without notice. Measurements are in inches and weights in pounds.

