



KEYED NOTES		
MARK	QTY	DESCRIPTION
1	1	REINFORCED FIBERGLASS GREASE INTERCEPTOR
2	2	24" HDPE ACCESS MANWAY COVER
3	2	FIBERGLASS MANWAY EXTENSION
4	2	PVC COUPLING
5	2	X" INLET/ OUTLET
6	1	4" VENT
7	1	INTERIOR BAFFLE
8	1	6" PVC DOUBLE TEE MANIFOLD
9	1	4" VENT SLEEVE IN BAFFLE
10	-	STRUCTURAL SUPPORT RIB (AS REQ'D)
11	4	LIFTING LUG
12	3	TANK SADDLE SUPPORT
13	12	ANCHOR BRACKETS FOR FLOOR MOUNTING
14	2	24" SQ INTERIOR STRIKER PLATES
15	1	CONCRETE HOUSEKEEPING PAD(BY OTHERS)
16	2	NAMEPLATE INDICATING MFG: PARKUSA WWW.PARKUSA.COM 888-611-PARK MODEL GTF-AG-XXXX

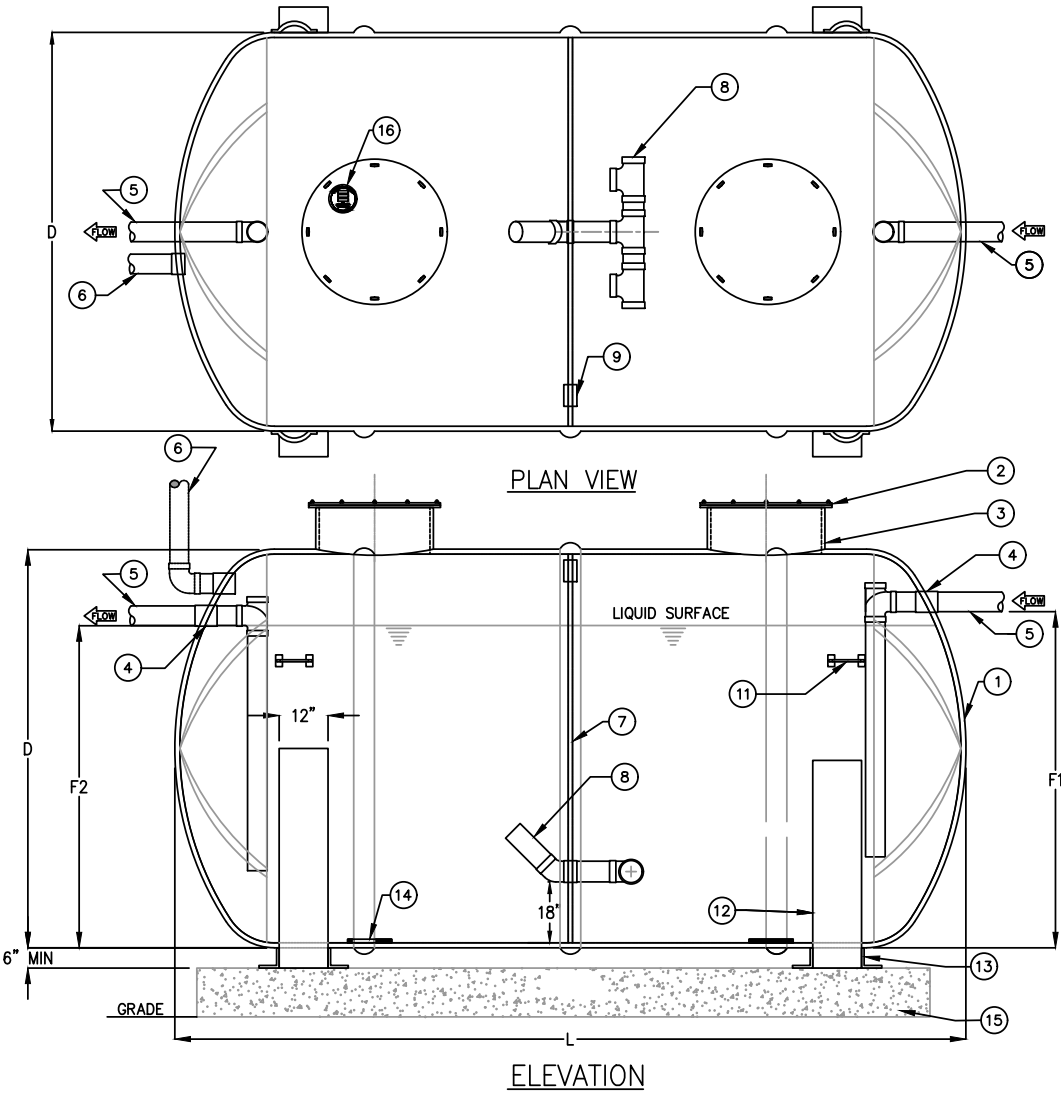

GREASE INTERCEPTOR SCHEDULE							
MODEL NO.	CAPACITY USGal	GREASE CAP. (LBS)	EMPTY WT (LBS)	LENGTH L	DIAMETER D	INLET FL1	OUTLET FL2
GTF-500	500	1,200	1,500	7'-0"	4'-0"	3'-3"	3'-0"
GTF-750	750	1,700	1,800	9'-0"	4'-0"	3'-3"	3'-0"
GTF-1000	1,000	2,300	2,200	11'-6"	4'-0"	3'-3"	3'-0"
GTF-1500	1,500	3,500	2,600	8'-6"	6'-0"	5'-3"	5'-0"
GTF-2000	2,000	4,600	3,100	11'-0"	6'-0"	5'-3"	5'-0"
GTF-2500	2,500	5,700	3,200	16'-0"	6'-0"	5'-3"	5'-0"
GTF-3000	3,000	6,900	3,400	12'-0"	7'-0"	6'-3"	6'-0"
GTF-3500	3,500	8,000	4,000	13'-6"	7'-0"	6'-3"	6'-0"
GTF-4000	4,000	9,300	4,600	15'-0"	7'-0"	6'-3"	6'-0"
GTF-5000	5,000	11,000	2,500	16'-0"	8'-0"	7'-3"	7'-0"

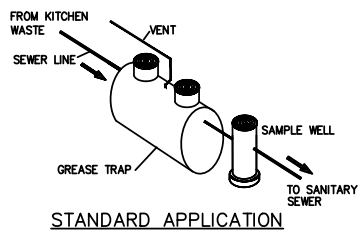

SPECIFICATIONS

TYPICAL APPLICATIONS INCLUDE COMMERCIAL AND INDUSTRIAL FOOD SERVICE KITCHENS WHERE EXCESSIVE GREASE MAY INTERFERE WITH THE PROPER DRAINAGE OF THE SEWER SYSTEM. THE GREASE INTERCEPTOR IS GENERALLY BURIED BELOW GRADE FOR GRAVITY FLOW SEWER SYSTEMS. A SAMPLE WELL IS UTILIZED ON THE OUTLET SIDE FOR SAMPLING BY THE LOCAL WATER AUTHORITY.

- TANK:** THE TANK SHELL SHALL BE CONSTRUCTED FROM COMPOSITE REINFORCED FIBERGLASS. TANK SHALL HAVE ONE-PIECE CONSTRUCTION AT SHELL, END CAPS, AND BAFFLE.
- FIBERGLASS COVER:** MANHOLE COVER MANUFACTURED OF COMPOSITE REINFORCED FIBERGLASS, HAVING MANWAY BOLT PATTERN AND STAINLESS STEEL HANDLES.(OPTIONAL W/OUT EXTENSION)
- D.I. CASTING:** MANHOLE FRAMES, COVERS OR GRATES ARE MANUFACTURED OF DUCTILE IRON CONFORMING TO ASTM A536, AASHTO M306, & AASHTO M105 STANDARDS. MANHOLE SHALL BE TRAFFIC DUTY.(W/EXTENSION)

ENGINEERING DATA

THE GREASE INTERCEPTOR IS STRUCTURALLY & HYDRAULICALLY ENGINEERED TO CONFORM TO REGIONAL PLUMBING CODES RECOMMENDED IN MOST CITIES. CONSULT WITH LOCAL AUTHORITIES FOR SPECIFIC APPLICATION REQUIREMENTS.
CONSULT WITH PARKUSA FOR EXACT EXCAVATION DIMENSIONS & SHIPPING INFORMATION

© ParkUSA. ALL RIGHTS RESERVED.



GREASE INTERCEPTOR
(ABOVE GRADE) MODEL GTF-AG 500 THRU 5,000

PM	PC	DRN	ENG	DWG. NO.	REV.	
.	.	DAM	.			
DATE				07/22	GTF-AG	A

CREATED ON 7/18/2022 BY [redacted] LAST MODIFIED ON 7/18/2022 5:39 PM BY dmpoyard