



GritCat™ DH

A cost-effective way to collect, dewater, transport, and dump sludges, slurries, and wet solids.

The GritCat™ dewatering box comes with reusable filter media. It is designed to be used with gritty or sandy type waste streams that typically do not require the use of a coagulant or flocculant for dewatering.

Available Models:



Model FL






Model RO

Features:

- Heavy-duty carbon steel construction (optional stainless steel)
- Designed to be handled by a standard fork truck
- Typical two 2" drain ports located on the bottom at opposite ends of the unit
- Filter media covers the floor and four walls
- Filter media comes in a choice of plastic or stainless steel and is held in place by bolts and brackets
- Filter support panels made of perforated plates (optional materials available for support panels)
- Optional: double wall filter element that splits the hopper into two compartments
- Standard filter media: 260-micron woven polyester belt press cloth; wire mesh filters available in 44-2,000 microns
- Available Dump Hopper sizes: 1, 2, 3, 4, and 5 cubic yards

Applications Include:

- Wastewater Treatment Plants
- Vac Truck Waste
- Industrial Plant Sump Waste
- Truck & Heavy Equipment Wash Basin Waste

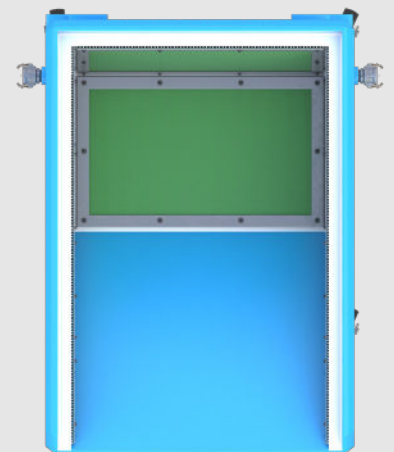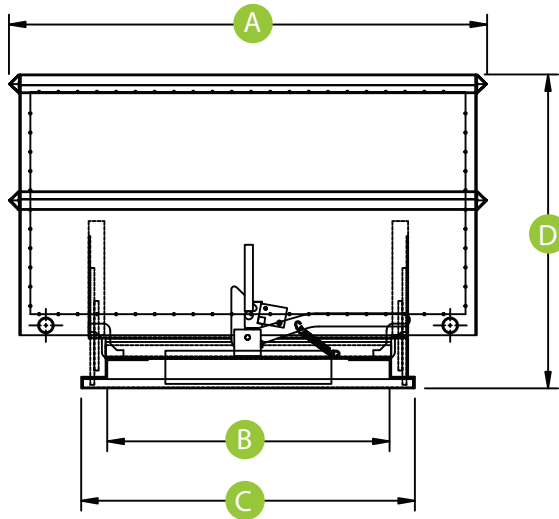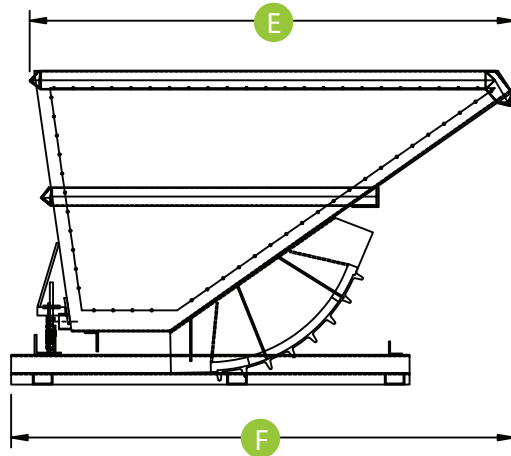

Model	Size	A	B	C	D	E	F	Dry Weight
GCDH01	1 yd	39 1/2	30 3/4	38 3/8	37 3/4	62 1/2	64 3/4	660
GCDH02	2 yd	51 1/2	42 1/2	50 1/4	46 1/4	73	75 3/4	860
GCDH03	3 yd	72	42 1/2	50 1/4	47 1/4	73	75 3/4	1270
GCDH04	4 yd	99 1/2	42 1/2	50 1/4	47 1/4	73	75 3/4	1670
GCDH05	5 yd	123 1/2	42 1/2	50 1/4	47 1/4	73	75 3/4	1950

*Specifications subject to change without notice. Measurements are in inches and weights in pounds.