



GritCat™ FL

A cost-effective way to collect, dewater, transport, and dump sludges, slurries, and wet solids.

The GritCat™ dewatering box comes with reusable filter media. It is designed to be used with gritty or sandy type waste streams that typically do not require the use of a coagulant or flocculant for dewatering.

Applications Include:

- Wastewater Treatment Plants
- Vac Truck Waste
- Industrial Plant Sump Waste
- Truck & Heavy Equipment Wash Basin Waste

Features:

- Heavy-duty carbon steel construction (optional stainless steel)
- Designed to be handled by a standard garbage truck
- Typically two 2" drain ports located on the back wall
- Filter media covers the floor and walls
- Filter support panels made of perforated plates (optional materials available for support panels)
- Optional: double wall filters
- Standard filter media: 260-micron woven polyester belt press cloth; wire mesh filters available in 44-2,000 microns
- Locked hard top available
- Available Front Loader sizes: 2, 3, and 4 cubic yards


Available Models:



Model DH



Model RO

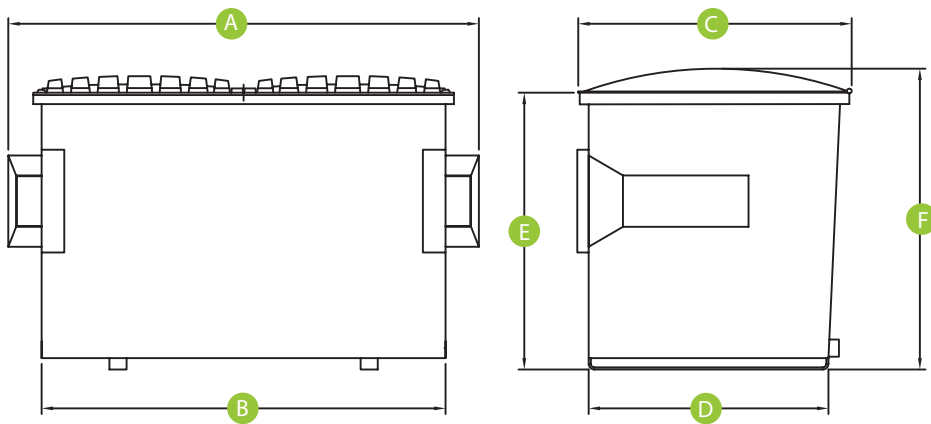

Model	Size	A	B	C	D	E	F	Dry Weight
GCFL02	2 yd	81 7/8	70 3/4	39 3/4	34	40 15/16	45 1/4	505
GCFL03	3 yd	82 7/16	70 3/4	46 3/4	42	48 1/2	52 11/16	602
GCFL04	4 yd	82 1/8	72	46 3/4	58	49 5/8	53 11/16	732

*Specifications subject to change without notice. Measurements are in inches and weights in pounds.

