


KEYED NOTES		
MARK	QTY	DESCRIPTION
1	1	30" GAV STEEL ACCESS COVER
2	1	3" RISER EXTENSION
3	1	JOINTS TO BE SEALED W/ PLASTIC RAM-NEK GASKET
4	1	PRECAST CONCRETE VAULT
5	1	VORTEX FILTER
6	1	NAMEPLATE MFG: PARKUSA 888-611-PARK WWW.PARKUSA.COM MODEL: VFC DATE MANUFACTURED

APPLICATIONS:
TYPICAL APPLICATIONS FOR THE MODEL VFC INCLUDE:

- LAUNDRIES
- FIRE PROTECTION
- EVAPORATIVE COOLING TOWER MAKE-UP
- PROCESS WATER
- NON-POTABLE WATER
- SITE IRRIGATION

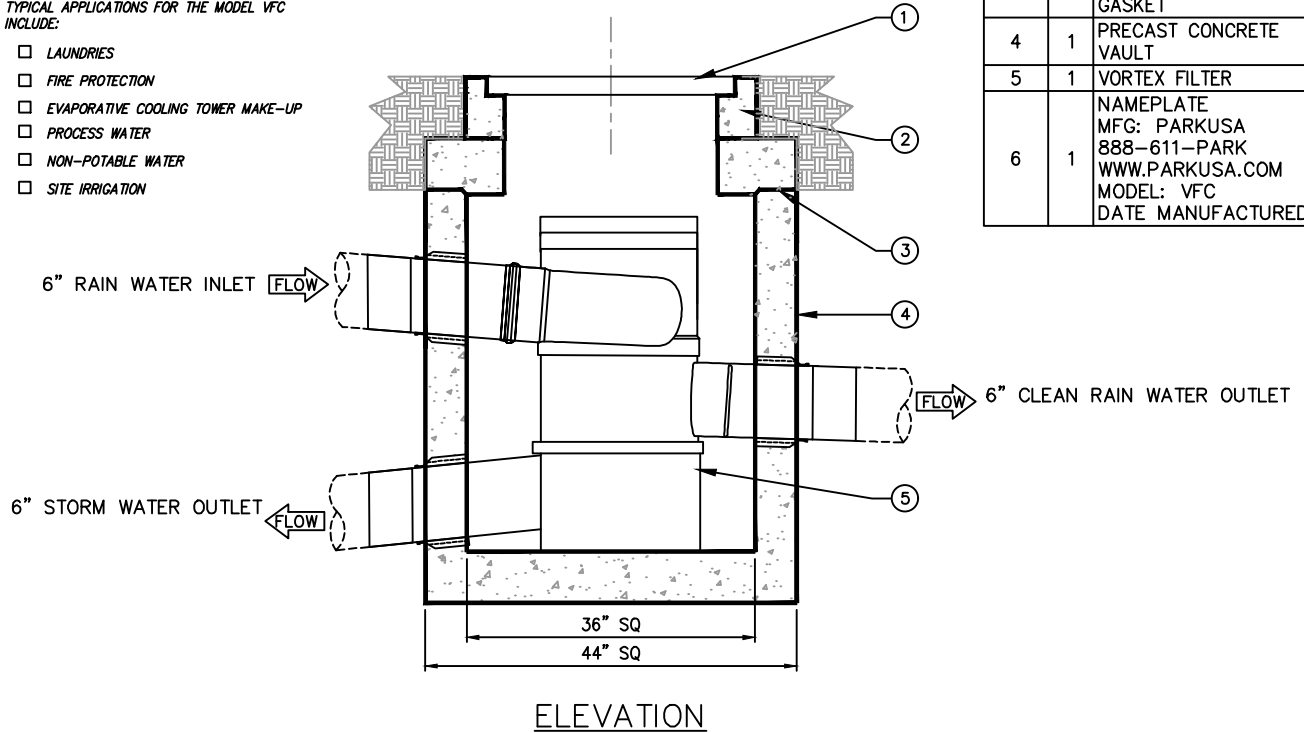


PLEASE CALL FOR ADDITIONAL SIZES & DIMENSIONS.

SPECIFICATIONS

- CONCRETE:** CLASS 1 CONCRETE WITH DESIGN STRENGTH OF 4500 PSI AT 28 DAYS. UNIT IS OF MONOLITHIC CONSTRUCTION AT FLOOR AND FIRST STAGE OF WALL WITH SECTIONAL RISER TO REQUIRED DEPTH.
- REINFORCEMENT:** GRADE 60 REINFORCED WITH STEEL REBAR CONFORMING TO ASTM A615 AND ASTM-C478 ON REQUIRED CENTERS OR EQUAL.
- COVER & FRAME:** ALL STEEL FABRICATION SHALL BE IN ACCORDANCE TO AWA D1.1. STEEL SHALL BE ASTM A36 CARBON STEEL, AND HOT-DIPPED GALVANIZED AFTER FABRICATION IN ACCORDANCE TO ASTM A123.



© ParkUSA. ALL RIGHTS RESERVED.

		VORTEX FILTER IN PRECAST CONCRETE VAULT		REV.	
				A	
PM	PC	DRN	ENG	DWG. NO.	VFC-1
DATE	2023				

PLOTTED ON 12/15/2023 9:20 AM BY Howerton, Chris Y:\Parduega\Website 2023 - NEED TO GO RAINWATER\VFC-1